



Series 1348-1349-1350, Non rotating cylinders

Construction characteristics

Cushion bushings	2011 UNI 9002/5 hardened alloy aluminium
Barrel	UNI 9006/1 aluminium alloy square section, hardened 30 micron oxidate
Piston seals	NBR oil-resistant rubber, PUR Piston rod and cushions
Pistons	polyacetal resin, self-lubricated and anti-wear, with plastoferrite rings in magnetic version
Piston rod	C43 chromed steel Ra = 0.2
End caps	UNI 5079 aluminium alloy casting painted black by cataphoresis
Cushion adjustment screws	brass

Operational characteristics

Fluid	filtered and lubricated air
Pressure	10 bar
Working temperature	-5 °C ... +70 °C

Please follow the suggestions below to ensure a long life for these cylinders:

- use clean and lubricated air.
- correct alignment during assembly with regard to the applied load so as to avoid radial components or bending the rod.
- avoid high speeds together with long strokes and heavy loads: this would produce kinetic energy which the cylinder cannot absorb, especially if used as a limit stop (in this case use mechanical stop device).
- evaluate the environmental characteristics of cylinder used (high temperature, hard atmosphere, dust, humidity etc.).

Please note: air must be dried for applications with lower temperature.

Use hydraulic oils H class (ISO VG32) for correct continued lubrication.



PNEUMATIC ACTUATION

Bore	Usable surface (square profile) cm ²	Max couple on the rod (max torque) Nm	Grade precision (rest rod, without load) anti-rotation	Cushion length mm
32	8,31	0,5	12'	22
40	12,41	0,8	12'	27
50	18,41	1,1	12'	27
63	29,67	1,5	12'	32

Standard strokes (for all diameters)

from 0 to 150, every 25 mm

Other stroke for these following bores:

- Ø32: 80 mm
 - Ø40: 80 - 160 mm
 - Ø50: 80 - 160 - 200 - 250 mm
 - Ø63: 80 - 160 - 200 - 300 - 320 mm
- On request are available strokes up to: 1000 mm

Stroke tolerance (ISO 15552)


Bore	Stroke	Tolerance
32	up to 320 mm	+2 0
40		
50		
63		

Basic version

Coding: 13V.Ø.stroke.01

V	VERSION
	48 = Magnetic chromed rod
	49 = Magnetic stainless steel rod
Ø	BORE
	32 = Ø32
	40 = Ø40
	50 = Ø50
	63 = Ø63

This is the configuration that represents the basic cylinder according to ISO standards. It can be directly anchored on machine parts using the four threads on the end cap. For other applications see the following pages where different types of attachments shown.

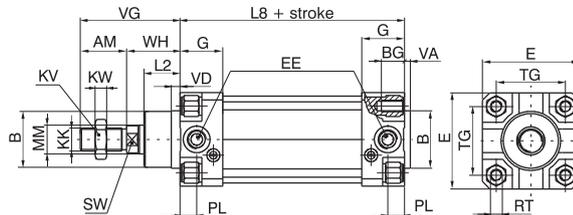

Through rod cylinder version

Coding: 13V.Ø.stroke.02

V	VERSION
	48 = Magnetic chromed rod
	49 = Magnetic stainless steel rod
Ø	BORE
	30 = Ø32
	40 = Ø40
	50 = Ø50
	63 = Ø63

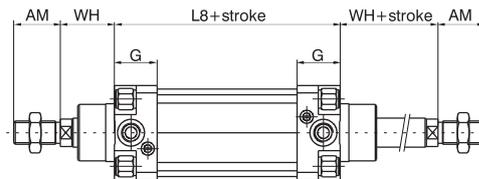


Table of dimensions

Bore		32	40	50	63
AM		22	24	32	32
B (d 11)		30	35	40	45
BG		12	12	16	16
E		46	52	65	75
EE		G 1/8"	G 1/4"	G 1/4"	G 3/8"
G		25	29	29,5	36
KK		M10x1,25	M12x1,25	M16x1,5	M16x1,5
KV		17	19	24	24
KW		6	7	8	8
L2		16	20	25	25
L8		94	105	106	121
MM		12	16	20	20
PL		9	11,5	13	14
RT		M6	M6	M8	M8
SW		10	13	17	17
TG		32,5	38	46,5	56,5
VA		4	4	4	4
VD		5	6	6	6
VG		48	54	69	69
WH		26	30	37	37
Weight g	Stroke 0	505	705	1320	1710
	every 10 mm	24	33	53	58

3 PNEUMATIC ACTUATION