



Technopolymer flanges

Flange Y

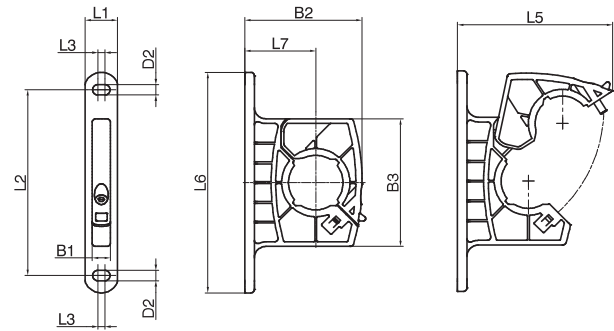


Flange X

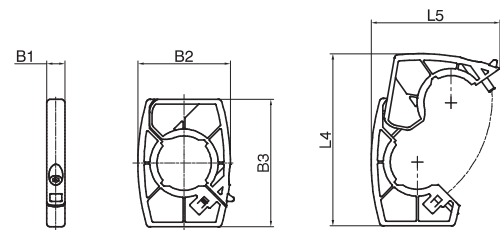


Model	B1	B2	B3	D2	L1	L2	L3	L4	L5	L6	L7
T171Y	7,8	50,5	55	Ø 4,5	14	80	3	/	66	95	30,5
T171X		40		/	/	/	/	74,5	55,5	/	/
T172Y	9,7	67,6	68	Ø 5,2	18	95	6,8	/	86,5	117,9	40,5
T172X		53,6		/	/	/	/	96,5	72,5	/	/
T173Y	9,7	75,5	80	Ø 5,2	18	110	6,8	/	98,3	133	44,5
T173X		62		/	/	/	/	112,8	85	/	/
T174Y	13,7	106,5	105	Ø 8,5	25	148	6,5	/	133,5	175	64
T174X		85		/	/	/	/	153,5	112	/	/

Aluminium flanges

Flange Y

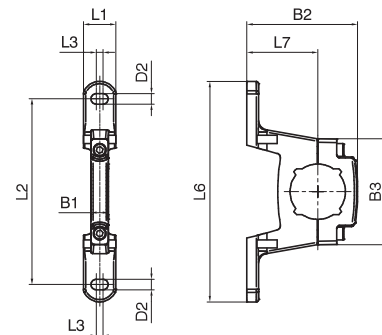

Flange X




Model	B1	B2	B3	D2	L1	L2	L3	L6	L7
N171Y	7,8	47,7	45,7	Ø 4,5	14	80	3	95	30,5
N171X		34,4		/	/	/	/	/	/
N172Y	9,7	64,6	55,6	Ø 5,2	18	95	6,8	117,9	40,5
N172X		55,6		/	/	/	/	/	/
N173Y	9,7	75,5	56	Ø 5,2	18	110	6,8	133	44,5
N173X		62		/	/	/	/	/	/
N174Y	13,7	106,5	102	Ø 8,5	25	148	6,5	175	64
N174X		85		/	/	/	/	/	/



► Fixing bracket

Coding: 17150

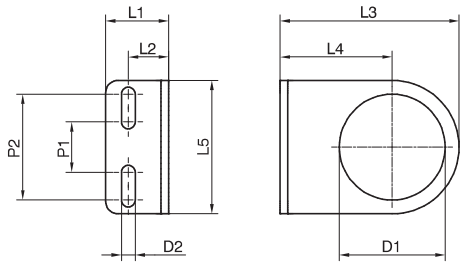

Model	L1	L2	L3	L4	L5	D1	D2	P1	P2
17150	20	13	50	30	40	30	5,5	20	30


2

AIR TREATMENT

► Pressure gauge

Coding: 17070VS

VERSION	
V	A = Dial Ø40
	B = Dial Ø50
SCALE	
S	A = 0 - 4 bar
	B = 0 - 6 bar
	C = 0 - 12 bar

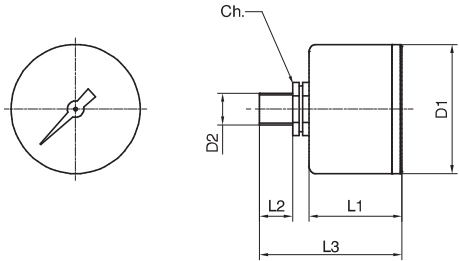

Model	D1	D2	L1	L2	L3	Ch
17070A...	41	Gc - 1/8"	26	10	44	14
17070B...	49	Gc - 1/8"	27	10	45	14