


Solenoid coil 30 mm Ø13, type MG



- Options:**
- Electrical connection via cables
 - Special voltages and powers
 - Self-extinguish

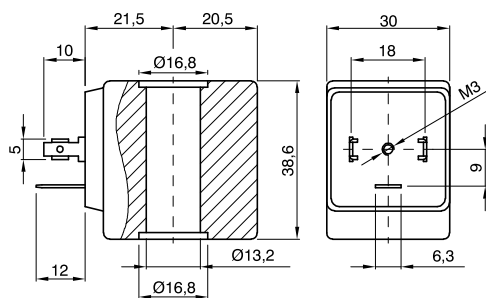

Ordering code

MG

VOLTAGE

- 4 = 12 VDC
- 5 = 24 VDC
- 56 = 24 VAC (50-60 Hz)
- 57 = 110 VAC (50-60 Hz)
- 58 = 230 VAC (50-60 Hz)




Operational characteristics

Class of insulation	Tolerance on AC voltage	Tolerance on DC voltage	IP Rating with connector	Continuous service	Electrical connection	Connector	Power		Weight (g)
F	-10% ... +15%	±10%	IP65	ED100%	DIN 43650 A	Code: 300.11.00	AC (VA) 15	DC (W) 10	120

Solenoid coil 22 mm Ø10, type MI



- Options:**
- Electrical connection via cables
 - Special voltages and powers
 - Self-extinguish

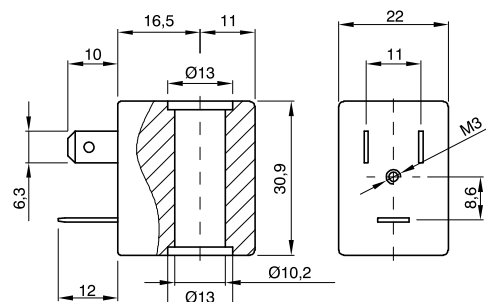

Ordering code

MI

VOLTAGE

- 4 = 12 VDC
- 5 = 24 VDC
- 21 = 48-50 VAC (50-60 Hz)
- 56 = 24 VAC (50-60 Hz)
- 57 = 110 VAC (50-60 Hz)
- 58 = 230 VAC (50-60 Hz)




Operational characteristics

Class of insulation	Tolerance on AC voltage	Tolerance on DC voltage	IP Rating with connector	Continuous service	Electrical connection	Connector	Power		Weight (g)
F	-10% ... +15%	±10%	IP65	ED100%	DIN 43650 B	Code: 305.11.00	AC (VA) 8	DC (W) 6,5	50

Solenoid coil 36 mm Ø13, type MK



- Options:**
- Electrical connection via cables
 - Special voltages and powers
 - Self-extinguish

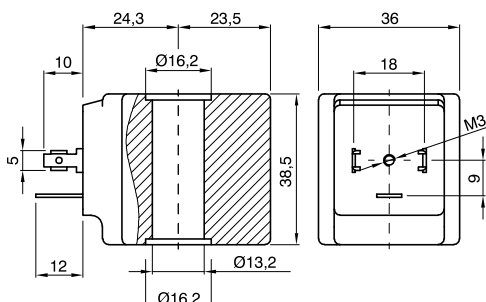

Ordering code

MK

VOLTAGE

- 4 = 12 VDC
- 5 = 24 VDC
- 56 = 24 VAC (50-60 Hz)
- 57 = 110 VAC (50-60 Hz)
- 58 = 230 VAC (50-60 Hz)




Operational characteristics

Class of insulation	Tolerance on AC voltage	Tolerance on DC voltage	IP Rating with connector	Continuous service	Electrical connection	Connector	Power		Weight (g)
H	-10% ... +15%	±10%	IP65	ED100%	DIN 43650 A	Code: 300.11.00	AC (VA) 30	DC (W) 27	200

Solenoid coil 30 mm Ø10, type XME



- CE II 2 G Ex mb IIC T4 Gb
CE II 2 D Ex mb IIIC T135°C Db IP65

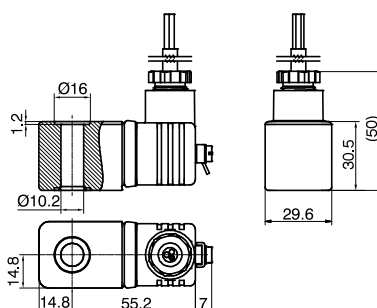

Ordering code

XME-3

VOLTAGE

- 5 = 24 VDC
- 56 = 24 VAC (50-60 Hz)
- 57 = 110 VAC (50-60 Hz)
- 58 = 230 VAC (50-60 Hz)



Operational characteristics

Class of insulation	Tolerance on AC voltage	Tolerance on DC voltage	IP Rating with connector	Continuous service	Electrical connection	Power		Weight (g)
H	-10% ... +15%	±10%	IP65	ED100%	3 m cable	AC (VA) 5,3	DC (W) 5,4	325