

## Stainless steel push-in fittings

### Series SS



#### Ordering code

**SS C 08 M5**

#### SERIES

**SS** = Stainless steel push-in fittings

#### MODEL TYPE

**C-G** = Straight male adaptor  
**C** = Straight male tapered adaptor  
**F-G** = Straight female adaptor (parallel thread)  
**H** = Complete single banjo tapered  
**L-G** = Swivel elbow male parallel adaptor  
**L** = Swivel elbow tapered adaptor  
**LF** = Female swivel elbow adaptor (parallel thread)  
**B-G** = Swivel male stud T parallel  
**B** = Swivel male stud T tapered  
**GJ** = Plug-in reducer  
**M** = Bulkhead connector  
**U** = Equal straight connector  
**G** = Reducer straight connector  
**V** = Elbow connector  
**E** = Elbow connector  
**Y** = Y connector  
**P** = Plug


#### TUBE CONNECTION

**04 ... 14** = Tube diameter (mm)

#### THREADED CONNECTION

**M5** = M5 x 0,8  
**01** = 1/8" Tapered  
**02** = 1/4" Tapered  
**03** = 3/8" Tapered  
**04** = 1/2" Tapered  
**G01** = 1/8" Parallel  
**G02** = 1/4" Parallel  
**G03** = 3/8" Parallel  
**G04** = 1/2" Parallel

See assembly instructions in the appendix on page 204

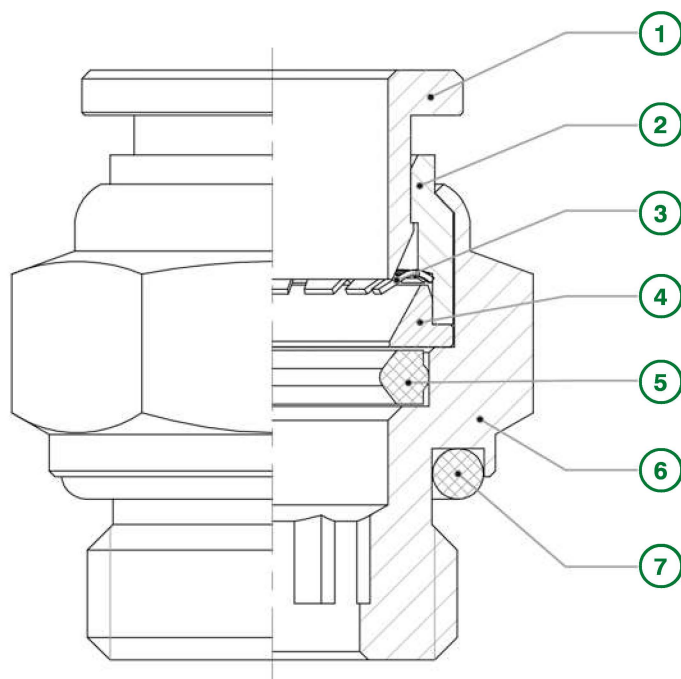

#### Components

- 1** Thrust sleeve
- 2** Lock ring
- 3** Crimping gripper
- 4** Supporting ring
- 5** Elastic ring
- 6** Fitting body
- 7** O-Ring seal

## Technical sheet

|                                 |                                    |                                                                                                                                                                                                                                                    |
|---------------------------------|------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>FLUIDS</b>                   |                                    | Compressed air, water, steam (for different fluid please contact our Technical Dept.)                                                                                                                                                              |
| <b>APPLICATIONS</b>             |                                    | Pneumatic equipments which are applied widely in the range of Industry such as food service industry, chemical industry and medical industry. In general where required to ensure anti-corrosion and acid resistant, or usage at high temperature. |
| <b>SUGGESTED TUBES</b>          |                                    | TPU (Polyurethane), PA11/PA12 (Polyamide), TPE (Polyethylene), TPA (Polyurethane/Copolyester)                                                                                                                                                      |
| <b>TUBES TOLERANCES</b>         |                                    | Diam. between 4 and 10 mm +/- 0,05 Diam. from 12 mm +/- 0,1                                                                                                                                                                                        |
| <b>RECOMMENDED LIMIT VALUES</b> | Temperature                        | The working temperatures range is between -20°C and +140°C                                                                                                                                                                                         |
|                                 | Working pressure                   | The working pressure range is between 0 and 1,5 MPa (0-15 bar)                                                                                                                                                                                     |
|                                 | Max. pressure                      | 1,8 MPa (18 bar)                                                                                                                                                                                                                                   |
|                                 | Note                               | For more complete informations please read the technical catalogue of your tube supplier.                                                                                                                                                          |
| <b>THREAD TYPE</b>              |                                    | BSP paralell UNI-ISO 228; BSP tapered UNI-ISO 7; Metric ISO/R 262                                                                                                                                                                                  |
| <b>MATERIALS</b>                | Body, sleeve, collar and back ring | Stainless Steel SUS316L                                                                                                                                                                                                                            |
|                                 | Spring                             | Stainless Steel SUS316L                                                                                                                                                                                                                            |
|                                 | Seals                              | FKM/FPM                                                                                                                                                                                                                                            |
| <b>IMPORTANT NOTE</b>           |                                    | The raw material is non-magnetic, however after cold working, a small amount of austenite could be transformed into martensite, which could be very weakly magnetic.                                                                               |

## Test results to FDA specifications compatibility, made by on behalf of the manufacturer


|          | Test report N. | Data       | Period (days) | Item                        | Main material                | Test purpose                                                                                                                                                                               |
|----------|----------------|------------|---------------|-----------------------------|------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>A</b> | TRHZ1208110    | 06/08/2012 | 6             | Seal ring                   | Viton FPM fluororubber (FKM) | The compliance with the food and drug administration regulations for determining the amount of chloroform-soluble extractives (ppm) from closures with sealing gaskets for food containers |
| <b>B</b> | TRHZ1208111    | 06/08/2012 | 6             | Elbow fitting mod SSV       | Stainless Steel SUS316L      | To determine total chromium content in the submitted sample                                                                                                                                |
| <b>C</b> | TRHZ1208112    | 06/08/2012 | 6             | Straight Fitting mod. SSC-G | Stainless Steel SUS316L      | To determine total chromium content in the submitted sample                                                                                                                                |

|          | Test method (ref. FDA 21 CFR 177.1210)            | Test result                                      | Conclusion                                                                                                                                                                             |
|----------|---------------------------------------------------|--------------------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>A</b> | Immersion for 2 hours in distilled water at 212°F | Detected value 13,0<br>Max permissible 50,0      | When tested as specified, the test results of the submitted sample comply with the FDA specifications for determining the amount of chloroform-soluble extractives for closures (clos) |
|          | Immersion for 2 hours in alcohol 8% at 212°F      | Detected value 7,0<br>Max permissible 50,0       |                                                                                                                                                                                        |
|          | Immersion for 2 hours in n-heptane at 150°F       | Detected value 11,5<br>Max permissible 50,0      |                                                                                                                                                                                        |
| <b>B</b> | Titration method                                  | Detected value 16,38%<br>Max permissible >=10,5% | When tested as specified, the test results of the submitted sample is suitable for contact with food                                                                                   |
| <b>C</b> | Titration method                                  | Detected value 17,18%<br>Max permissible >=10,5% | When tested as specified, the test results of the submitted sample is suitable for contact with food                                                                                   |




**ART. SSC-G**
**Straight male adaptor (parallel)**


| COD.      | ØD | G   | L1  | L2   | Ø  | W  | Box | Weight |
|-----------|----|-----|-----|------|----|----|-----|--------|
| SSC04-M5  | 4  | M5  | 4   | 19,3 | 2  | 10 | 1   | 6,60   |
| SSC04-G01 | 4  | 1/8 | 5,5 | 17,3 | 3  | 13 | 1   | 9,80   |
| SSC04-G02 | 4  | 1/4 | 6,5 | 21,2 | 3  | 17 | 1   | 16,00  |
| SSC06-M5  | 6  | M5  | 4   | 20,6 | 2  | 12 | 1   | 10,00  |
| SSC06-G01 | 6  | 1/8 | 5,5 | 18,8 | 4  | 13 | 1   | 9,80   |
| SSC06-G02 | 6  | 1/4 | 6,5 | 18,8 | 4  | 16 | 1   | 16,00  |
| SSC08-G01 | 8  | 1/8 | 5,5 | 23,2 | 5  | 14 | 1   | 13,00  |
| SSC08-G02 | 8  | 1/4 | 6,5 | 20,7 | 6  | 16 | 1   | 15,00  |
| SSC08-G03 | 8  | 3/8 | 7,5 | 22,5 | 6  | 21 | 1   | 24,00  |
| SSC10-G02 | 10 | 1/4 | 6,5 | 26,4 | 8  | 17 | 1   | 22,00  |
| SSC10-G03 | 10 | 3/8 | 7,5 | 22,9 | 8  | 20 | 1   | 26,00  |
| SSC10-G04 | 10 | 1/2 | 9,0 | 24   | 8  | 24 | 1   | 38,00  |
| SSC12-G02 | 12 | 1/4 | 6,5 | 31,3 | 8  | 21 | 1   | 34,00  |
| SSC12-G03 | 12 | 3/8 | 7,5 | 25,4 | 10 | 20 | 1   | 28,00  |
| SSC12-G04 | 12 | 1/2 | 9   | 25,4 | 10 | 24 | 1   | 43,60  |
| SSC14-G03 | 14 | 3/8 | 7,5 | 33   | 10 | 22 | 1   | 38,00  |
| SSC14-G04 | 14 | 1/2 | 9,0 | 32   | 10 | 24 | 1   | 43,00  |



**ART. SSC**
**Straight male adaptor (tapered)**


| COD.     | ØD | R   | L1   | L2   | Ø  | W  | Box | Weight |
|----------|----|-----|------|------|----|----|-----|--------|
| SSC04-01 | 4  | 1/8 | 7,5  | 16,8 | 3  | 10 | 1   | 9,80   |
| SSC04-02 | 4  | 1/4 | 9,5  | 21   | 3  | 14 | 1   | 14,00  |
| SSC06-01 | 6  | 1/8 | 7,5  | 19,3 | 4  | 12 | 1   | 9,80   |
| SSC06-02 | 6  | 1/4 | 9,5  | 19,8 | 4  | 14 | 1   | 16,00  |
| SSC06-03 | 6  | 3/8 | 10,5 | 22   | 4  | 17 | 1   | 22,00  |
| SSC06-04 | 6  | 1/2 | 12,5 | 24   | 4  | 21 | 1   | 42,00  |
| SSC08-01 | 8  | 1/8 | 7,5  | 23,7 | 6  | 14 | 1   | 13,00  |
| SSC08-02 | 8  | 1/4 | 9,5  | 22,2 | 6  | 14 | 1   | 15,00  |
| SSC08-03 | 8  | 3/8 | 10,5 | 22,5 | 6  | 17 | 1   | 20,00  |
| SSC08-04 | 8  | 1/2 | 12,5 | 24   | 6  | 21 | 1   | 38,00  |
| SSC10-02 | 10 | 1/4 | 9,5  | 26,4 | 8  | 17 | 1   | 19,72  |
| SSC10-03 | 10 | 3/8 | 10,5 | 22,9 | 8  | 17 | 1   | 26,00  |
| SSC10-04 | 10 | 1/2 | 12,5 | 25   | 8  | 21 | 1   | 36,00  |
| SSC12-02 | 12 | 1/4 | 9,5  | 31,3 | 8  | 21 | 1   | 36,00  |
| SSC12-03 | 12 | 3/8 | 10,5 | 26,4 | 10 | 20 | 1   | 28,00  |
| SSC12-04 | 12 | 1/2 | 13,5 | 26,4 | 10 | 21 | 1   | 43,60  |
| SSC14-04 | 14 | 1/2 | 12,5 | 33   | 10 | 22 | 1   | 43,00  |




ART. **SSCF-G****Straight female adaptor (parallel thread)**


| COD.      | ØD | G   | L1   |  |  |  |
|-----------|----|-----|------|-----------------------------------------------------------------------------------|-----------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|
| SSCF04-M5 | 4  | M5  | 20,2 | 12                                                                                | 1                                                                                 | 8,00                                                                                |
| SSCF04-01 | 4  | 1/8 | 21,2 | 12                                                                                | 1                                                                                 | 8,00                                                                                |
| SSCF04-02 | 4  | 1/4 | 21   | 17                                                                                | 1                                                                                 | 18,00                                                                               |
| SSCF06-01 | 6  | 1/8 | 21,6 | 14                                                                                | 1                                                                                 | 16,00                                                                               |
| SSCF06-02 | 6  | 1/4 | 21   | 17                                                                                | 1                                                                                 | 18,00                                                                               |
| SSCF08-01 | 8  | 1/8 | 25   | 17                                                                                | 1                                                                                 | 16,00                                                                               |
| SSCF08-02 | 8  | 1/4 | 24,5 | 17                                                                                | 1                                                                                 | 21,00                                                                               |

ART. **SSH****Complete single banjo tapered**

| COD.     | ØD | R   | L1   | L2   | D2   |  |  |
|----------|----|-----|------|------|------|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|
| SSH04-01 | 4  | 1/8 | 25,5 | 26   | 10,5 | 1                                                                                   | 24,00                                                                               |
| SSH06-01 | 6  | 1/8 | 25,5 | 26   | 12,5 | 1                                                                                   | 28,00                                                                               |
| SSH06-02 | 6  | 1/4 | 28   | 28   | 12,5 | 1                                                                                   | 38,00                                                                               |
| SSH08-01 | 8  | 1/8 | 25,5 | 29   | 14,5 | 1                                                                                   | 28,00                                                                               |
| SSH08-02 | 8  | 1/4 | 28   | 30   | 14,5 | 1                                                                                   | 40,00                                                                               |
| SSH08-03 | 8  | 3/8 | 33,2 | 33   | 14,5 | 1                                                                                   | 66,00                                                                               |
| SSH10-02 | 10 | 1/4 | 28   | 32   | 17,5 | 1                                                                                   | 46,00                                                                               |
| SSH10-03 | 10 | 3/8 | 33,2 | 35   | 17,5 | 1                                                                                   | 74,00                                                                               |
| SSH12-02 | 12 | 1/4 | 28   | 34   | 20,5 | 1                                                                                   | 56,00                                                                               |
| SSH12-03 | 12 | 3/8 | 33,2 | 36,5 | 20,5 | 1                                                                                   | 84,00                                                                               |
| SSH12-04 | 12 | 1/2 | 37,2 | 38   | 20,5 | 1                                                                                   | 120,00                                                                              |


ART. **SSL-G****Swivel elbow male parallel adaptor**

| COD.      | ØD | G   | L1  | L2   | L3   | ØD1  |  |  |  |
|-----------|----|-----|-----|------|------|------|--------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------|
| SSL04-M5  | 4  | M5  | 4   | 17,5 | 18,3 | 10   | 10                                                                                   | 1                                                                                     | 12,00                                                                                 |
| SSL04-G01 | 4  | 1/8 | 5,5 | 20   | 18,3 | 10   | 13                                                                                   | 1                                                                                     | 16,00                                                                                 |
| SSL04-G02 | 4  | 1/4 | 6,5 | 27,5 | 23   | 10,5 | 14                                                                                   | 1                                                                                     | 24,00                                                                                 |
| SSL06-M5  | 6  | M5  | 4   | 17,5 | 20,3 | 12   | 10                                                                                   | 1                                                                                     | 16,00                                                                                 |
| SSL06-G01 | 6  | 1/8 | 5,5 | 22   | 20,3 | 12   | 13                                                                                   | 1                                                                                     | 20,00                                                                                 |
| SSL06-G02 | 6  | 1/4 | 6,5 | 23   | 20,3 | 12   | 16                                                                                   | 1                                                                                     | 26,00                                                                                 |
| SSL06-G03 | 6  | 3/8 | 7,5 | 28   | 24   | 12,5 | 17                                                                                   | 1                                                                                     | 34,00                                                                                 |
| SSL08-G01 | 8  | 1/8 | 5,5 | 22,5 | 22,3 | 14   | 13                                                                                   | 1                                                                                     | 24,00                                                                                 |
| SSL08-G02 | 8  | 1/4 | 6,5 | 23,5 | 22,3 | 14   | 16                                                                                   | 1                                                                                     | 30,00                                                                                 |
| SSL08-G03 | 8  | 3/8 | 7,5 | 28   | 27   | 14,5 | 17                                                                                   | 1                                                                                     | 40,00                                                                                 |
| SSL10-G01 | 10 | 1/8 | 5,5 | 32,3 | 30,5 | 17,5 | 17                                                                                   | 1                                                                                     | 36,00                                                                                 |
| SSL10-G02 | 10 | 1/4 | 6,5 | 31   | 26,4 | 17   | 17                                                                                   | 1                                                                                     | 46,00                                                                                 |
| SSL10-G03 | 10 | 3/8 | 7,5 | 28,5 | 26,4 | 17   | 20                                                                                   | 1                                                                                     | 50,00                                                                                 |
| SSL10-G04 | 10 | 1/2 | 9   | 31   | 30,5 | 17,5 | 21                                                                                   | 1                                                                                     | 48,50                                                                                 |
| SSL12-G02 | 12 | 1/4 | 6,5 | 30,5 | 34   | 20,5 | 14                                                                                   | 1                                                                                     | 56,00                                                                                 |
| SSL12-G03 | 12 | 3/8 | 7,5 | 30   | 29,4 | 20   | 20                                                                                   | 1                                                                                     | 62,00                                                                                 |
| SSL12-G04 | 12 | 1/2 | 9   | 30,5 | 29,4 | 20   | 24                                                                                   | 1                                                                                     | 76,00                                                                                 |
| SSL14-G03 | 14 | 3/8 | 7,5 | 33   | 37   | 22   | 17                                                                                   | 1                                                                                     | 96,00                                                                                 |
| SSL14-G04 | 12 | 1/2 | 9   | 35   | 37   | 22   | 21                                                                                   | 1                                                                                     | 100,00                                                                                |




**ART. SSL**
**Swivel elbow tapered adaptor**



| COD.     | ØD | R   | L1   | L2   | L3   | ØD1  |    |   |       |
|----------|----|-----|------|------|------|------|----|---|-------|
| SSL04-01 | 4  | 1/8 | 7,5  | 20   | 18,3 | 10   | 12 | 1 | 14,00 |
| SSL04-02 | 4  | 1/4 | 9,5  | 27,5 | 23   | 10,5 | 14 | 1 | 22,00 |
| SSL06-01 | 6  | 1/8 | 7,5  | 23   | 20,3 | 12   | 12 | 1 | 19,00 |
| SSL06-02 | 6  | 1/4 | 9,5  | 23   | 20,3 | 12   | 14 | 1 | 22,00 |
| SSL06-03 | 6  | 3/8 | 10,5 | 28   | 24   | 12,5 | 17 | 1 | 30,00 |
| SSL08-01 | 8  | 1/8 | 7,5  | 23,5 | 22,3 | 14   | 12 | 1 | 24,20 |
| SSL08-02 | 8  | 1/4 | 9,5  | 23,5 | 22,3 | 14   | 14 | 1 | 27,90 |
| SSL08-03 | 8  | 3/8 | 10,5 | 28   | 27   | 14,5 | 17 | 1 | 34,00 |
| SSL10-02 | 10 | 1/4 | 9,5  | 33   | 26,4 | 17   | 17 | 1 | 46,00 |
| SSL10-03 | 10 | 3/8 | 10,5 | 30   | 26,4 | 17   | 17 | 1 | 46,00 |
| SSL12-02 | 12 | 1/4 | 9,5  | 30,5 | 34   | 20,5 | 14 | 1 | 52,00 |
| SSL12-03 | 12 | 3/8 | 10,5 | 31,5 | 29,4 | 20   | 17 | 1 | 62,00 |
| SSL12-04 | 12 | 1/2 | 13,5 | 33,5 | 29,4 | 20   | 21 | 1 | 74,90 |


**ART. SSLF**
**Female swivel elbow adaptor (parallel thread)**


| COD.      | ØD | G   | L1   | L2 | D2   |      |    |   |       |
|-----------|----|-----|------|----|------|------|----|---|-------|
| SSLF04-01 | 4  | 1/8 | 25,5 | 23 | 10,5 | 9,2  | 10 | 1 | 24,00 |
| SSLF06-01 | 6  | 1/8 | 27   | 24 | 12,5 | 9,2  | 14 | 1 | 26,00 |
| SSLF06-02 | 6  | 1/4 | 28   | 24 | 12,5 | 9,2  | 17 | 1 | 32,00 |
| SSLF08-01 | 8  | 1/8 | 27   | 27 | 14,5 | 11,2 | 14 | 1 | 30,00 |
| SSLF08-02 | 8  | 1/4 | 28   | 27 | 14,5 | 11,2 | 17 | 1 | 34,00 |



**ART. SSB-G**
**Swivel male stud T parallel**


| COD.      | ØD | G   | L1  | L2   | L3   | ØD1 |    |   |       |
|-----------|----|-----|-----|------|------|-----|----|---|-------|
| SSB04-M5  | 4  | M5  | 4   | 17,5 | 36,6 | 10  | 10 | 1 | 18,00 |
| SSB04-G01 | 4  | 1/8 | 5,5 | 20   | 36,6 | 10  | 13 | 1 | 22,00 |
| SSB06-M5  | 6  | M5  | 4   | 17,5 | 40,6 | 12  | 10 | 1 | 22,00 |
| SSB06-G01 | 6  | 1/8 | 5,5 | 22   | 40,6 | 12  | 13 | 1 | 27,00 |
| SSB06-G02 | 6  | 1/4 | 6,5 | 23   | 40,6 | 12  | 16 | 1 | 34,00 |
| SSB08-G01 | 8  | 1/8 | 5,5 | 22,5 | 44,6 | 14  | 13 | 1 | 34,00 |
| SSB08-G02 | 8  | 1/4 | 6,5 | 23,5 | 44,6 | 14  | 16 | 1 | 39,80 |
| SSB10-G02 | 10 | 1/4 | 6,5 | 31   | 52,8 | 17  | 17 | 1 | 60,00 |
| SSB10-G03 | 10 | 3/8 | 7,5 | 28,5 | 52,8 | 17  | 20 | 1 | 64,00 |
| SSB12-G03 | 12 | 3/8 | 7,5 | 30   | 58,8 | 20  | 20 | 1 | 86,00 |
| SSB12-G04 | 12 | 1/2 | 9   | 30,5 | 58,8 | 20  | 24 | 1 | 98,00 |




**ART. SSB**
**Swivel male stud T tapered**



| COD.     | ØD | R   | L1   | L2   | L3   | ØD1 |  |  |  |
|----------|----|-----|------|------|------|-----|-----------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|
| SSB04-01 | 4  | 1/8 | 7,5  | 20   | 36,6 | 10  | 12                                                                                | 1                                                                                   | 20,00                                                                               |
| SSB06-01 | 6  | 1/8 | 7,5  | 23   | 40,6 | 12  | 12                                                                                | 1                                                                                   | 26,00                                                                               |
| SSB06-02 | 6  | 1/4 | 9,5  | 23   | 40,6 | 12  | 14                                                                                | 1                                                                                   | 30,00                                                                               |
| SSB08-01 | 8  | 1/8 | 7,5  | 23,5 | 44,6 | 14  | 12                                                                                | 1                                                                                   | 22,00                                                                               |
| SSB08-02 | 8  | 1/4 | 9,5  | 23,5 | 44,6 | 14  | 14                                                                                | 1                                                                                   | 37,00                                                                               |
| SSB10-02 | 10 | 1/4 | 9,5  | 33   | 52,8 | 17  | 17                                                                                | 1                                                                                   | 56,00                                                                               |
| SSB10-03 | 10 | 3/8 | 10,5 | 30   | 52,8 | 17  | 17                                                                                | 1                                                                                   | 58,00                                                                               |
| SSB12-03 | 12 | 3/8 | 10,5 | 31,5 | 58,8 | 20  | 17                                                                                | 1                                                                                   | 80,00                                                                               |
| SSB12-04 | 12 | 1/2 | 13,5 | 33,5 | 58,8 | 20  | 21                                                                                | 1                                                                                   | 96,00                                                                               |


**ART. SSGJ**
**Plug-in reducer**


| COD.      | ØD | D1   | D2 | L1 | L2   |  |  |
|-----------|----|------|----|----|------|---------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------|
| SSGJ06-04 | 4  | 10,5 | 6  | 41 | 6,7  | 1                                                                                     | 6,00                                                                                  |
| SSGJ08-06 | 6  | 12,5 | 8  | 44 | 7,0  | 1                                                                                     | 10,00                                                                                 |
| SSGJ08-04 | 4  | 10,5 | 8  | 43 | 7,0  | 1                                                                                     | 8,00                                                                                  |
| SSGJ10-08 | 8  | 14,5 | 10 | 47 | 8,0  | 1                                                                                     | 12,00                                                                                 |
| SSGJ10-06 | 6  | 12,5 | 10 | 47 | 8,0  | 1                                                                                     | 12,00                                                                                 |
| SSGJ12-10 | 10 | 17,5 | 12 | 53 | 8,7  | 1                                                                                     | 20,00                                                                                 |
| SSGJ12-08 | 8  | 14,5 | 12 | 52 | 8,7  | 1                                                                                     | 16,00                                                                                 |
| SSGJ14-10 | 10 | 17,5 | 14 | 56 | 10,0 | 1                                                                                     | 30,00                                                                                 |


**ART. SSM**
**Bulkhead connector**


| COD.  | ØD | ØD1 | L    | L1 max | M     |  |  |  |
|-------|----|-----|------|--------|-------|-------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------|
| SSM04 | 4  | 10  | 27   | 8      | M12x1 | 14                                                                                  | 1                                                                                     | 16,00                                                                                 |
| SSM06 | 6  | 12  | 29,5 | 8      | M14x1 | 17                                                                                  | 1                                                                                     | 24,10                                                                                 |
| SSM08 | 8  | 14  | 32,5 | 8,5    | M16x1 | 19                                                                                  | 1                                                                                     | 31,70                                                                                 |
| SSM10 | 10 | 17  | 36,8 | 9,5    | M20x1 | 24                                                                                  | 1                                                                                     | 56,00                                                                                 |
| SSM12 | 12 | 20  | 39,8 | 11,5   | M22x1 | 26                                                                                  | 1                                                                                     | 70,00                                                                                 |
| SSM14 | 14 | 24  | 42   | 17     | M24x1 | 27                                                                                  | 1                                                                                     | 75,00                                                                                 |




ART. **SSU**

**Equal straight connector**



| COD.  | ØD | ØD1 | L    |   |       |
|-------|----|-----|------|---|-------|
| SSU04 | 4  | 11  | 27   | 1 | 11,40 |
| SSU06 | 6  | 13  | 29,5 | 1 | 15,40 |
| SSU08 | 8  | 15  | 32,5 | 1 | 20,40 |
| SSU10 | 10 | 18  | 36,8 | 1 | 33,00 |
| SSU12 | 12 | 21  | 39,8 | 1 | 47,70 |
| SSU14 | 14 | 22  | 42   | 1 | 46,00 |




ART. **SSG**

**Reducer straight connector**



| COD.     | ØD1 | ØD2 | D1   | D2   | L1   |   |       |
|----------|-----|-----|------|------|------|---|-------|
| SSG04-06 | 4   | 6   | 10,5 | 12,5 | 30,6 | 1 | 14,00 |
| SSG06-08 | 6   | 8   | 12,5 | 14,5 | 32,8 | 1 | 18,00 |
| SSG08-10 | 8   | 10  | 14,5 | 17,5 | 35   | 1 | 26,00 |
| SSG10-12 | 10  | 12  | 17,5 | 20,5 | 38,2 | 1 | 40,00 |




ART. **SSV**

**Elbow connector**



| COD.  | ØD | ØD1 | L    |   |       |
|-------|----|-----|------|---|-------|
| SSV04 | 4  | 10  | 18,3 | 1 | 16,00 |
| SSV06 | 6  | 12  | 20,3 | 1 | 17,10 |
| SSV08 | 8  | 14  | 22,3 | 1 | 23,20 |
| SSV10 | 10 | 17  | 26,4 | 1 | 37,60 |
| SSV12 | 12 | 20  | 29,4 | 1 | 56,00 |
| SSV14 | 14 | 22  | 37   | 1 | 98,00 |




ART. **SSE**

**T connector**



| COD.  | ØD | ØD1 | L    | L1   |   |       |
|-------|----|-----|------|------|---|-------|
| SSE04 | 4  | 10  | 18,3 | 36,6 | 1 | 18,00 |
| SSE06 | 6  | 12  | 20,3 | 40,6 | 1 | 23,70 |
| SSE08 | 8  | 14  | 22,3 | 44,6 | 1 | 31,80 |
| SSE10 | 10 | 17  | 26,4 | 52,8 | 1 | 53,50 |
| SSE12 | 12 | 20  | 29,4 | 58,8 | 1 | 79,00 |
| SSE14 | 14 | 14  | 37   | 74   | 1 | 80,00 |




ART. **SSY**

**Y connector**



| COD.  | ØD | L1   | L2 | ØD2 |  |  |
|-------|----|------|----|-----|------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|
| SSY04 | 4  | 36   | 14 | 11  | 1                                                                                  | 24,00                                                                               |
| SSY06 | 6  | 37,5 | 16 | 13  | 1                                                                                  | 34,00                                                                               |
| SSY08 | 8  | 41,3 | 18 | 15  | 1                                                                                  | 38,00                                                                               |
| SSY10 | 10 | 44,3 | 21 | 18  | 1                                                                                  | 56,00                                                                               |
| SSY12 | 12 | 51   | 24 | 21  | 1                                                                                  | 84,00                                                                               |

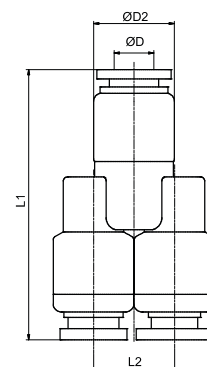

ART. **SSP**

**Plug**



| COD.  | D1 | D2 | L1 |  |  |
|-------|----|----|----|-----------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|
| SSP04 | 4  | 6  | 28 | 1                                                                                 | 2,00                                                                                |
| SSP06 | 6  | 8  | 33 | 1                                                                                 | 4,00                                                                                |
| SSP08 | 8  | 10 | 37 | 1                                                                                 | 8,00                                                                                |
| SSP10 | 10 | 12 | 42 | 1                                                                                 | 14,00                                                                               |
| SSP12 | 12 | 14 | 44 | 1                                                                                 | 18,00                                                                               |
| SSP14 | 14 | 16 | 46 | 1                                                                                 | 32,00                                                                               |

