



Series T200

The **T200** series, consist of a broad range of valves with various type of actuation. The connections for this series are from G 1/8" to G 1/4". The main components constituting the valves of the Tecno228 series are manufactured with high performance technopolymer. The use of technopolymer has resulted in a light weight product which can be offered to the market at very interesting prices. The **T228** valves, are manufactured with G1/8" connections, 3 and 5 ways function, mechanical or pneumatically operated, monostable spring or pneumatic return, bistable and in 5 ways 3 positions version with closed, open and pressured centres. This series is completely interchangeable with the standard 228 series (with alluminium body). The **T224** valves, are manufactured with G 1/4" connections, 3/2, 5/2 and 5/3 ways function, (monostable or bistable), depending on version and actuation (manual, pneumatic, or electrical), and self aligning (pneumatic, electric or spring).

Maximum fitting torque

Thread	Maximum torque (Nm)
G 1/8"	4
G 1/4"	9

Construction characteristics

G 1/8" (T228) and G 1/4" (T224)	
Body	Technopolymer
Operators	Technopolymer
Seals	NBR
Spacers	Technopolymer
Spools	Technopolymer Stainless steel only for the versions Push button-Spring and Lever lateral
Springs	Spring steel
Pistons	Technopolymer

Use and maintenance

This valves have an average life of 15 million cycles depending on the application and air quality. Filtered and lubricated air using specified lubricants will reduce the wear of the seals and ensures long and trouble free operation. Please ensure that the valve is being used according with the manufacturers specification, such as air pressure and temperature. The exhaust port of the distributor has to be protected in a dusty and dirty environment. Repair kits including the spool complete with seals are available for overhauling the valves. However, although this is a simple operation it should be carried out by a competent person.

ATTENTION: use hydraulic oil class H for lubrication such as CASTROL MAGNA SW32.

► Tappet - Spring

Operational characteristics


Fluid	Filtered air. No lubrication needed, if applied it shall be continuous
Max. working pressure (bar)	10
Temperature °C	-5 ... +50
Flow rate at 6 bar with $\Delta p = 1$ (NL/min)	620
Orifice size (mm)	6
Working ports size	G1/8"

3/2 ways



Weight 60 g


T228.32.0.1



Coding: T228.T.0.1

T	TYPE
32	= 3 ways, 2 positions
52	= 5 ways, 2 positions

Operating force 33 N




5/2 ways



Weight 72 g

T228.52.0.1



1

AIR DISTRIBUTION

► Tappet panel - Spring

Operational characteristics


Fluid	Filtered air. No lubrication needed, if applied it shall be continuous
Max. working pressure (bar)	10
Temperature °C	-5 ... +50
Flow rate at 6 bar with $\Delta p = 1$ (NL/min)	620
Orifice size (mm)	6
Working ports size	G1/8"

3/2 ways



Weight 77 g


T228.32.1.1



Coding: T228.T.1.1

T	TYPE
32	= 3 ways, 2 positions
52	= 5 ways, 2 positions

Operating force 33 N




5/2 ways



Weight 90 g

T228.52.1.1



► Lever roller-Spring

Operational characteristics


Fluid	Filtered air. No lubrication needed, if applied it shall be continuous
Max. working pressure (bar)	10
Temperature °C	-5 ... +50
Flow rate at 6 bar with $\Delta p = 1$ (NL/min)	620
Orifice size (mm)	6
Working ports size	G1/8"

3/2 ways



Weight 90 g


T228.32.2.V



Coding: T228.T.2.V

T	TYPE
32	= 3 ways, 2 positions
52	= 5 ways, 2 positions
V	VERSION
1	= Plastic roller
1/1	= ball bearing
1/2	= Metal roller

Operating force 15 N




5/2 ways



Weight 102 g

T228.52.2.V





Spool type valves and solenoid valves

Series T200 - Mechanical and manual command - G1/8"

Lever roller ball bearing - Spring


Coding: T228.T.2.1/1

Operational characteristics


Fluid	Filtered air. No lubrication needed, if applied it shall be continuous
Max. working pressure (bar)	10
Temperature °C	-5 ... +50
Flow rate at 6 bar with $\Delta p=1$ (NL/min)	620
Orifice size (mm)	6
Working ports size	G1/8"

T	TYPE
32	= 3 ways, 2 positions
52	= 5 ways, 2 positions

Operating force 15 N



3/2 ways



Weight 105 g


T228.32.2.1/1

5/2 ways



Weight 117 g

T228.52.2.1/1



Lever button - Spring


Coding: T228.T.2.6/©

Operational characteristics


Fluid	Filtered air. No lubrication needed, if applied it shall be continuous
Max. working pressure (bar)	10
Temperature °C	-5 ... +50
Flow rate at 6 bar with $\Delta p=1$ (NL/min)	620
Orifice size (mm)	6
Working ports size	G1/8"

T	TYPE
32	= 3 ways, 2 positions
52	= 5 ways, 2 positions
C	LEVER COLOR
1	= Red
2	= Black
3	= Green

Operating force 15 N



3/2 ways



Weight 95 g


T228.32.2.6/©

5/2 ways



Weight 87 g

T228.52.2.6/©




Lever roller unidirectional - Spring

Coding: T228.T.3.©


Operational characteristics

Fluid	Filtered air. No lubrication needed, if applied it shall be continuous
Max. working pressure (bar)	10
Temperature °C	-5 ... +50
Flow rate at 6 bar with $\Delta p=1$ (NL/min)	620
Orifice size (mm)	6
Working ports size	G1/8"

T	TYPE
32	= 3 ways, 2 positions
52	= 5 ways, 2 positions
V	VERSION
1	= Plastic roller
1/2	= Metal roller



3/2 ways



Weight 85 g


T228.32.3.©

5/2 ways



Weight 97 g

T228.52.3.©




► **Lever panel Ø30 - 2 positions**

Operational characteristics

Fluid	Filtered air. No lubrication needed, if applied it shall be continuous
Max. working pressure (bar)	10
Temperature °C	-5 ... +50
Flow rate at 6 bar with $\Delta p = 1$ (NL/min)	620
Orifice size (mm)	6
Working ports size	G1/8"

Coding: T228.T.5/C

T	TYPE
32	3 ways, 2 positions
52	5 ways, 2 positions
C	LEVER COLOR
1	Red
2	Black
3	Green



3/2 ways



Weight 168 g

T228.32.5/C

5/2 ways



Weight 180 g

T228.52.5/C

1

AIR DISTRIBUTION


► **Lever lateral 2 positions**

Operational characteristics

Fluid	Filtered air. No lubrication needed, if applied it shall be continuous
Max. working pressure (bar)	10
Temperature °C	-5 ... +50
Flow rate at 6 bar with $\Delta p = 1$ (NL/min)	620
Orifice size (mm)	6
Working ports size	G1/8"

Coding: T228.T.55/C

T	TYPE
32	3 ways, 2 positions
52	5 ways, 2 positions
C	LEVER COLOR
1	Red
2	Black
3	Green



3/2 ways



Weight 84 g

T228.32.55/C

5/2 ways



Weight 96 g

T228.52.55/C

► **Push button Ø30 - spring**


Operational characteristics

Fluid	Filtered air. No lubrication needed, if applied it shall be continuous
Max. working pressure (bar)	10
Temperature °C	-5 ... +50
Flow rate at 6 bar with $\Delta p = 1$ (NL/min)	620
Orifice size (mm)	6
Working ports size	G1/8"

Coding: T228.T.6.1/C

T	TYPE
32	3 ways, 2 positions
52	5 ways, 2 positions
C	BUTTON COLOR
1	Red
2	Black
3	Green

Operating force 33 N



3/2 ways



Weight 125 g



T228.32.6.1/C

5/2 ways



Weight 137 g

T228.52.6.1/C

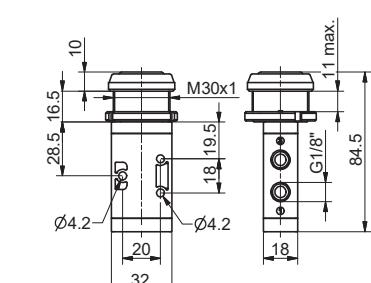




► Push button - Spring

Coding: T228.T.6.22/©


Operational characteristics	
Fluid	Filtered air. No lubrication needed, if applied it shall be continuous
Max. working pressure (bar)	10
Temperature °C	-5 ... +50
Flow rate at 6 bar with $\Delta p=1$ (NI/min)	620
Orifice size (mm)	6
Working ports size	G1/8"

TYPE
T 32 = 3 ways, 2 positions
52 = 5 ways, 2 positions
BUTTON COLOR
1 = Red
2 = Black
3 = Green
4 = Yellow

Operating force 33 N



3/2 ways



Weight 200 g


T228.32.6.22/©

5/2 ways




Weight 212 g

T228.52.6.22/©



Operating force 33 N



► Raised push button Ø22 - Spring


Coding: T228.T.6.23/©

Operational characteristics	
Fluid	Filtered air. No lubrication needed, if applied it shall be continuous
Max. working pressure (bar)	10
Temperature °C	-5 ... +50
Flow rate at 6 bar with $\Delta p=1$ (NI/min)	620
Orifice size (mm)	6
Working ports size	G1/8"

TYPE
T 32 = 3 ways, 2 positions
52 = 5 ways, 2 positions
BUTTON COLOR
1 = Red
2 = Black
3 = Green
4 = Yellow

Operating force 33 N

3/2 ways



Weight 205 g


T228.32.6.23/©

5/2 ways



Weight 212 g

T228.52.6.23/©




► Push button Ø22 - 2 positions

Coding: T228.T.6.25


Operational characteristics	
Fluid	Filtered air. No lubrication needed, if applied it shall be continuous
Max. working pressure (bar)	10
Temperature °C	-5 ... +50
Flow rate at 6 bar with $\Delta p=1$ (NI/min)	620
Orifice size (mm)	6
Working ports size	G1/8"

TYPE
T 32 = 3 ways, 2 positions
52 = 5 ways, 2 positions

Operating force 33 N



3/2 ways



Weight 210 g


T228.32.6.25

5/2 ways



Weight 202 g

T228.52.6.25




► **Switch 2 positions**

Coding: T228.1.6.27

Operational characteristics	
Fluid	Filtered air. No lubrication needed, if applied it shall be continuous
Max. working pressure (bar)	10
Temperature °C	-5 ... +50
Flow rate at 6 bar with $\Delta p=1$ (NL/min)	620
Orifice size (mm)	6
Working ports size	G1/8"

T	TYPE
	32 = 3 ways, 2 positions
	52 = 5 ways, 2 positions

Operating force 33 N




3/2 ways



Weight 205 g

T228.32.6.27




5/2 ways



Weight 217 g

T228.52.6.27



1

AIR DISTRIBUTION


► **Key switch 2 positions**

Coding: T228.1.6.28

Operational characteristics	
Fluid	Filtered air. No lubrication needed, if applied it shall be continuous
Max. working pressure (bar)	10
Temperature °C	-5 ... +50
Flow rate at 6 bar with $\Delta p=1$ (NL/min)	620
Orifice size (mm)	6
Working ports size	G1/8"

T	TYPE
	32 = 3 ways, 2 positions
	52 = 5 ways, 2 positions

Operating force 33 N




3/2 ways



Weight 205 g

T228.32.6.28




5/2 ways



Weight 217 g

T228.52.6.28



► **Palm push button Ø30 2 positions**


Coding: T228.1.7.1/C

Operational characteristics	
Fluid	Filtered air. No lubrication needed, if applied it shall be continuous
Max. working pressure (bar)	10
Temperature °C	-5 ... +50
Flow rate at 6 bar with $\Delta p=1$ (NL/min)	620
Orifice size (mm)	6
Working ports size	G1/8"

T	TYPE
	32 = 3 ways, 2 positions
	52 = 5 ways, 2 positions

C	BUTTON COLOR
	1 = Red
	2 = Black

Operating force 33 N




3/2 ways



Weight 118 g

T228.32.7.1/C




5/2 ways



Weight 130 g

T228.52.7.1/C





Spool type valves and solenoid valves

Series T200 - Mechanical and manual command - G1/8"

Push button - Spring

Coding: T228.T.8.1/●


Operational characteristics

Fluid	Filtered air. No lubrication needed, if applied it shall be continuous
Max. working pressure (bar)	10
Temperature °C	-5 ... +50
Flow rate at 6 bar with $\Delta p=1$ (NL/min)	620
Orifice size (mm)	6
Working ports size	G1/8"


TYPE

32 = 3 ways, 2 positions
52 = 5 ways, 2 positions
BUTTON COLOR
1 = Red
2 = Black
3 = Green

Operating force 33 N




3/2 ways



Weight 95 g

T228.32.8.1/●

5/2 ways



Weight 107 g

T228.52.8.1/●

Push button 2 positions

Coding: T228.T.8/●


Operational characteristics

Fluid	Filtered air. No lubrication needed, if applied it shall be continuous
Max. working pressure (bar)	10
Temperature °C	-5 ... +50
Flow rate at 6 bar with $\Delta p=1$ (NL/min)	620
Orifice size (mm)	6
Working ports size	G1/8"


TYPE

32 = 3 ways, 2 positions
52 = 5 ways, 2 positions
BUTTON COLOR
1 = Red
2 = Black
3 = Green

Operating force 10 N




3/2 ways



Weight 95 g

T228.32.8.8/●

5/2 ways



Weight 107 g

T228.52.8.8/●

Lever lateral - Spring


Coding: T228.T.9.1/●

Operational characteristics


Fluid	Filtered air. No lubrication needed, if applied it shall be continuous
Max. working pressure (bar)	10
Temperature °C	-5 ... +50
Flow rate at 6 bar with $\Delta p=1$ (NL/min)	620
Orifice size (mm)	6
Working ports size	G1/8"

TYPE

32 = 3 ways, 2 positions
52 = 5 ways, 2 positions
LEVER COLOR
1 = Red
2 = Black
3 = Green




3/2 ways



Weight 100 g

T228.32.9.1/●

5/2 ways



Weight 110 g


T228.52.9.1/●

► **Lever lateral 2 positions**

Coding: T228.T.9/C

Operational characteristics	
Fluid	Filtered air. No lubrication needed, if applied it shall be continuous
Max. working pressure (bar)	10
Temperature °C	-5 ... +50
Flow rate at 6 bar with $\Delta p=1$ (NL/min)	620
Orifice size (mm)	6
Working ports size	G1/8"

TYPE	LEVER COLOR		
	1 = Red	2 = Black	3 = Green
T	32 = 3 ways, 2 positions		
	52 = 5 ways, 2 positions		
C			




3/2 ways



Weight 100 g

T228.32.9/C




5/2 ways



Weight 110 g

T228.52.9/C



1

AIR DISTRIBUTION

► **Lever lateral-Spring 3 positions**



Coding: T228.53.F.9.1/C

Operational characteristics	
Fluid	Filtered air. No lubrication needed, if applied it shall be continuous
Max. working pressure (bar)	10
Temperature °C	-5 ... +50
Flow rate at 6 bar with $\Delta p=1$ (NL/min)	410
Orifice size (mm)	6
Working ports size	G1/8"

FUNCTION	LEVER COLOR		
	31 = Closed centres	32 = Open centres	3 = Green
F			
C			



Weight 140 g



► **Lateral lever - 3 positions detent**



Coding: T228.53.F.9/C

Operational characteristics	
Fluid	Filtered air. No lubrication needed, if applied it shall be continuous
Max. working pressure (bar)	10
Temperature °C	-5 ... +70
Flow rate at 6 bar with $\Delta p=1$ (NL/min)	410
Orifice size (mm)	6
Working ports size	G1/8"

FUNCTION	LEVER COLOR		
	31 = Closed centres	32 = Open centres	3 = Green
F			
C			



Weight 110 g



► Pneumatic-Pneumatic

Coding: T228.T.11.11



Operational characteristics

Fluid	Filtered air. No lubrication needed, if applied it shall be continuous
Max. working pressure (bar)	10
Temperature °C	-5 ... +50
Flow rate at 6 bar with $\Delta p=1$ (NL/min)	620
Orifice size (mm)	6
Working ports size	G1/8"
Pilot ports size	G1/8"


TYPE

32 = 3 ways, 2 positions
52 = 5 ways, 2 positions

Minimum pilot pressure 2 bar



3/2 ways



Weight 77 g


T228.32.11.11

5/2 ways



Weight 90 g

T228.52.11.11



► Pneumatic - Pneumatic 3 positions

Coding: T228.53.F.11.11

Operational characteristics

Fluid	Filtered air. No lubrication needed, if applied it shall be continuous
Max. working pressure (bar)	10
Temperature °C	-5 ... +50
Flow rate at 6 bar with $\Delta p=1$ (NL/min)	410
Orifice size (mm)	6
Working ports size	G1/8"
Pilot ports size	G1/8"


FUNCTION

31 = Closed centres
32 = Open centres
33 = Pressured centres

Minimum pilot pressure 3 bar



Weight 110 g





Spool type valves and solenoid valves

Series T200 - Mechanical and manual command - G1/4"

► Push button - Spring


Coding: T224.1.8.1

Operational characteristics

Fluid	Filtered air. No lubrication needed, if applied it shall be continuous
Max. working pressure (bar)	10
Temperature °C	-5 ... +50
Flow rate at 6 bar with $\Delta p=1$ (NL/min)	1050
Orifice size (mm)	8.5
Working ports size	G1/4"

1	TYPE
	32 = 3 ways, 2 positions
	52 = 5 ways, 2 positions

Operating force 50 N




3/2 ways



Weight 170 g

T224.32.8.1




5/2 ways



Weight 200 g

T224.52.8.1



► Push button 2 positions


Coding: T224.1.8

Operational characteristics

Fluid	Filtered air. No lubrication needed, if applied it shall be continuous
Max. working pressure (bar)	10
Temperature °C	-5 ... +50
Flow rate at 6 bar with $\Delta p=1$ (NL/min)	1050
Orifice size (mm)	8.5
Working ports size	G1/4"

1	TYPE
	32 = 3 ways, 2 positions
	52 = 5 ways, 2 positions

Operating force 13 N




3/2 ways



Weight 170 g

T224.32.8




5/2 ways



Weight 200 g

T224.52.8



► Lever lateral - Spring

Coding: T224.1.9.1/C


Operational characteristics

Fluid	Filtered air. No lubrication needed, if applied it shall be continuous
Max. working pressure (bar)	10
Temperature °C	-5 ... +50
Flow rate at 6 bar with $\Delta p=1$ (NL/min)	1050
Orifice size (mm)	8.5
Working ports size	G1/4"

1	TYPE
	32 = 3 ways, 2 positions
	52 = 5 ways, 2 positions

C	LEVER COLOR
	1 = Red
	2 = Black

3	3 = Green




3/2 ways



Weight 220 g

T224.32.9.1/C

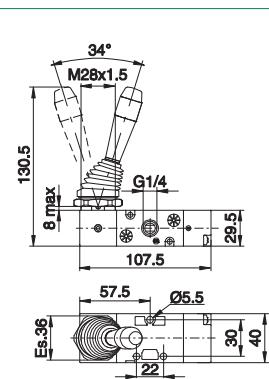


5/2 ways



Weight 250 g

T224.52.9.1/C



► **Lever lateral 2 positions**

Coding: T224.1.9.0/C

Operational characteristics

Fluid	Filtered air. No lubrication needed, if applied it shall be continuous
Max. working pressure (bar)	10
Temperature °C	-5 ... +50
Flow rate at 6 bar with $\Delta p=1$ (NL/min)	1050
Orifice size (mm)	8.5
Working ports size	G1/4"


T	TYPE
32	3 ways, 2 positions
52	5 ways, 2 positions
C	LEVER COLOR
1	Red
2	Black
3	Green

3/2 ways



Weight 220 g

T224.32.9.0/C




5/2 ways



Weight 250 g

T224.52.9.0/C



1

AIR DISTRIBUTION

► **Lever lateral-Spring 3 positions**



Coding: T224.53.F.9.1/C

Operational characteristics

Fluid	Filtered air. No lubrication needed, if applied it shall be continuous
Max. working pressure (bar)	10
Temperature °C	-5 ... +50
Flow rate at 6 bar with $\Delta p=1$ (NL/min)	900
Orifice size (mm)	8.5
Working ports size	G1/4"

F	FUNCTION
31	Closed centres
32	Open centres
33	Pressured centres
C	LEVER COLOR
1	Red
2	Black
3	Green

Weight 270 g

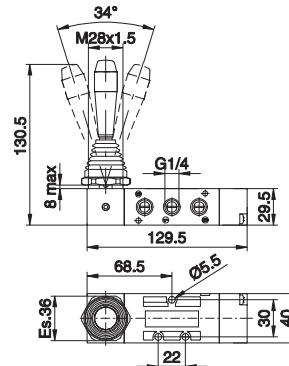

► **Lateral lever - 3 positions detent**



Coding: T224.53.F.9.0/C

Operational characteristics

Fluid	Filtered air. No lubrication needed, if applied it shall be continuous
Max. working pressure (bar)	10
Temperature °C	-5 ... +50
Flow rate at 6 bar with $\Delta p=1$ (NL/min)	900
Orifice size (mm)	8.5
Working ports size	G1/4"

F	FUNCTION
31	Closed centres
32	Open centres
33	Pressured centres
C	LEVER COLOR
1	Red
2	Black
3	Green

Weight 270 g

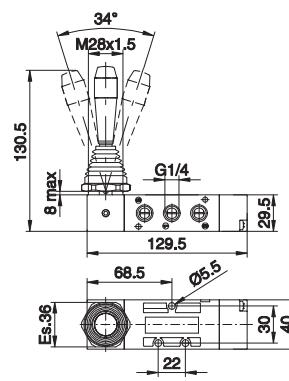



Spool type valves and solenoid valves

Series T200 - Pneumatic command valves - G1/4"

1

AIR DISTRIBUTION

Pneumatic - Spring

Coding: T224.11.11


Operational characteristics

Fluid	Filtered air. No lubrication needed, if applied it shall be continuous
Max. working pressure (bar)	10
Temperature °C	-5 ... +50
Flow rate at 6 bar with $\Delta p=1$ (NL/min)	1050
Orifice size (mm)	8.5
Working ports size	G1/4"
Pilot ports size	G1/8"

TYPE

32 = 3 ways, 2 positions
52 = 5 ways, 2 positions

Minimum pilot pressure 2,5 bar



3/2 ways



Weight 110 g



T224.32.11.1

5/2 ways



Weight 140 g

T224.52.11.1



Pneumatic - Differential

Coding: T224.11.12


Operational characteristics

Fluid	Filtered air. No lubrication needed, if applied it shall be continuous
Max. working pressure (bar)	10
Temperature °C	-5 ... +50
Flow rate at 6 bar with $\Delta p=1$ (NL/min)	1050
Orifice size (mm)	8.5
Working ports size	G1/4"
Pilot ports size	G1/8"

TYPE

32 = 3 ways, 2 positions
52 = 5 ways, 2 positions

Minimum pilot pressure 2 bar



3/2 ways



Weight 110 g



T224.32.11.12

5/2 ways



Weight 140 g

T224.52.11.12



Pneumatic-Pneumatic

Coding: T224.11.11


Operational characteristics

Fluid	Filtered air. No lubrication needed, if applied it shall be continuous
Max. working pressure (bar)	10
Temperature °C	-5 ... +50
Flow rate at 6 bar with $\Delta p=1$ (NL/min)	1050
Orifice size (mm)	8.5
Working ports size	G1/4"
Pilot ports size	G1/8"

TYPE

32 = 3 ways, 2 positions
52 = 5 ways, 2 positions

Minimum pilot pressure 2 bar



3/2 ways



Weight 110 g



T224.32.11.11

5/2 ways



Weight 140 g

T224.52.11.11





► Pneumatic - Pneumatic 3 positions

Coding: T224.53.F.11.11

Operational characteristics	
Fluid	Filtered air. No lubrication needed, if applied it shall be continuous
Max. working pressure (bar)	10
Temperature °C	-5 ... +50
Flow rate at 6 bar with $\Delta p=1$ (NL/min)	900
Orifice size (mm)	8.5
Working ports size	G1/4"
Pilot ports size	G1/8"

F	FUNCTION
	31 = Closed centres
32 = Open centres	
33 = Pressured centres	



Weight 160 g
Minimum pilot pressure 3 bar