


► Sensor brackets codes - 1500_., RS_., HS_.

Coding: 1306.Ⓣ

	TYPE
Ⓣ	A = from Ø32 to Ø63
	B = from Ø80 to Ø125
	C = Ø160-Ø200

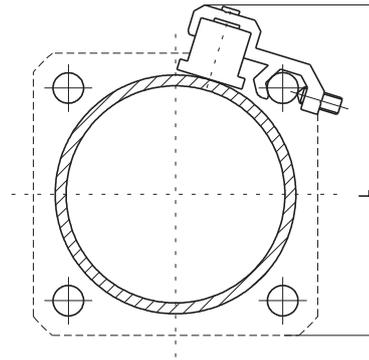


Sensor for microbore cylinders

For technical characteristics and ordering codes see the "Magnetic sensors" sections

Bore	Ø32	Ø40	Ø50	Ø63	Ø80	Ø100	Ø125	Ø160	Ø200
L	59	65	76	87	103	121	144	179	215


► Support for solenoid valves

Coding: 1306.15
Ø32...Ø100

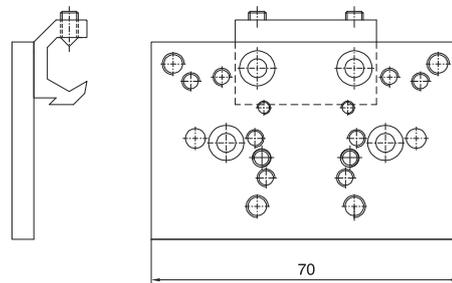

Fixing holes for valves series:

- A = 414/2
- B = 824
- C = 828, T488, 488, 484
- D = 2400
- E = 2600
- F = Bases for ISO solenoid valves
- G = 858/2
- H = T424
- L = 888

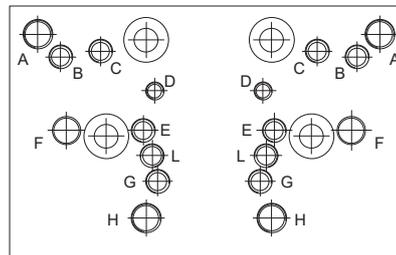


This accessory allows valves or solenoid valves to mount on the side of the cylinder. Support should be anchored to the tie rods and on it either a threaded distributor can be mounted or a base upon which an ISO distributor can be mounted. Once installed the connections must be done with fittings and pipes. All of the threaded holes on the support plate are dedicated to different valves series as per attached drawing.

► Bases for ISO solenoid valves

Coding: 1320.Ⓝ

	STANDARDS
Ⓝ	21 = ISO1
	22 = ISO2



	Dimensions			
Bases for solenoid valves	A	B	C	D
ISO 1	40	75	15	G 1/8"
ISO 2	50	95	20	G 1/4"